

**FIG. 1**  
(Prior Art)

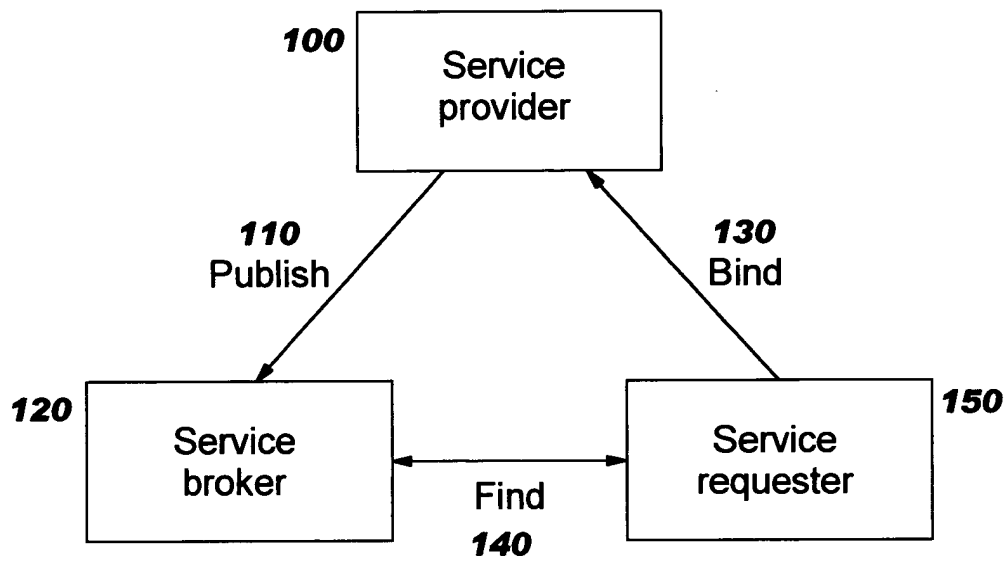


FIG. 2  
200

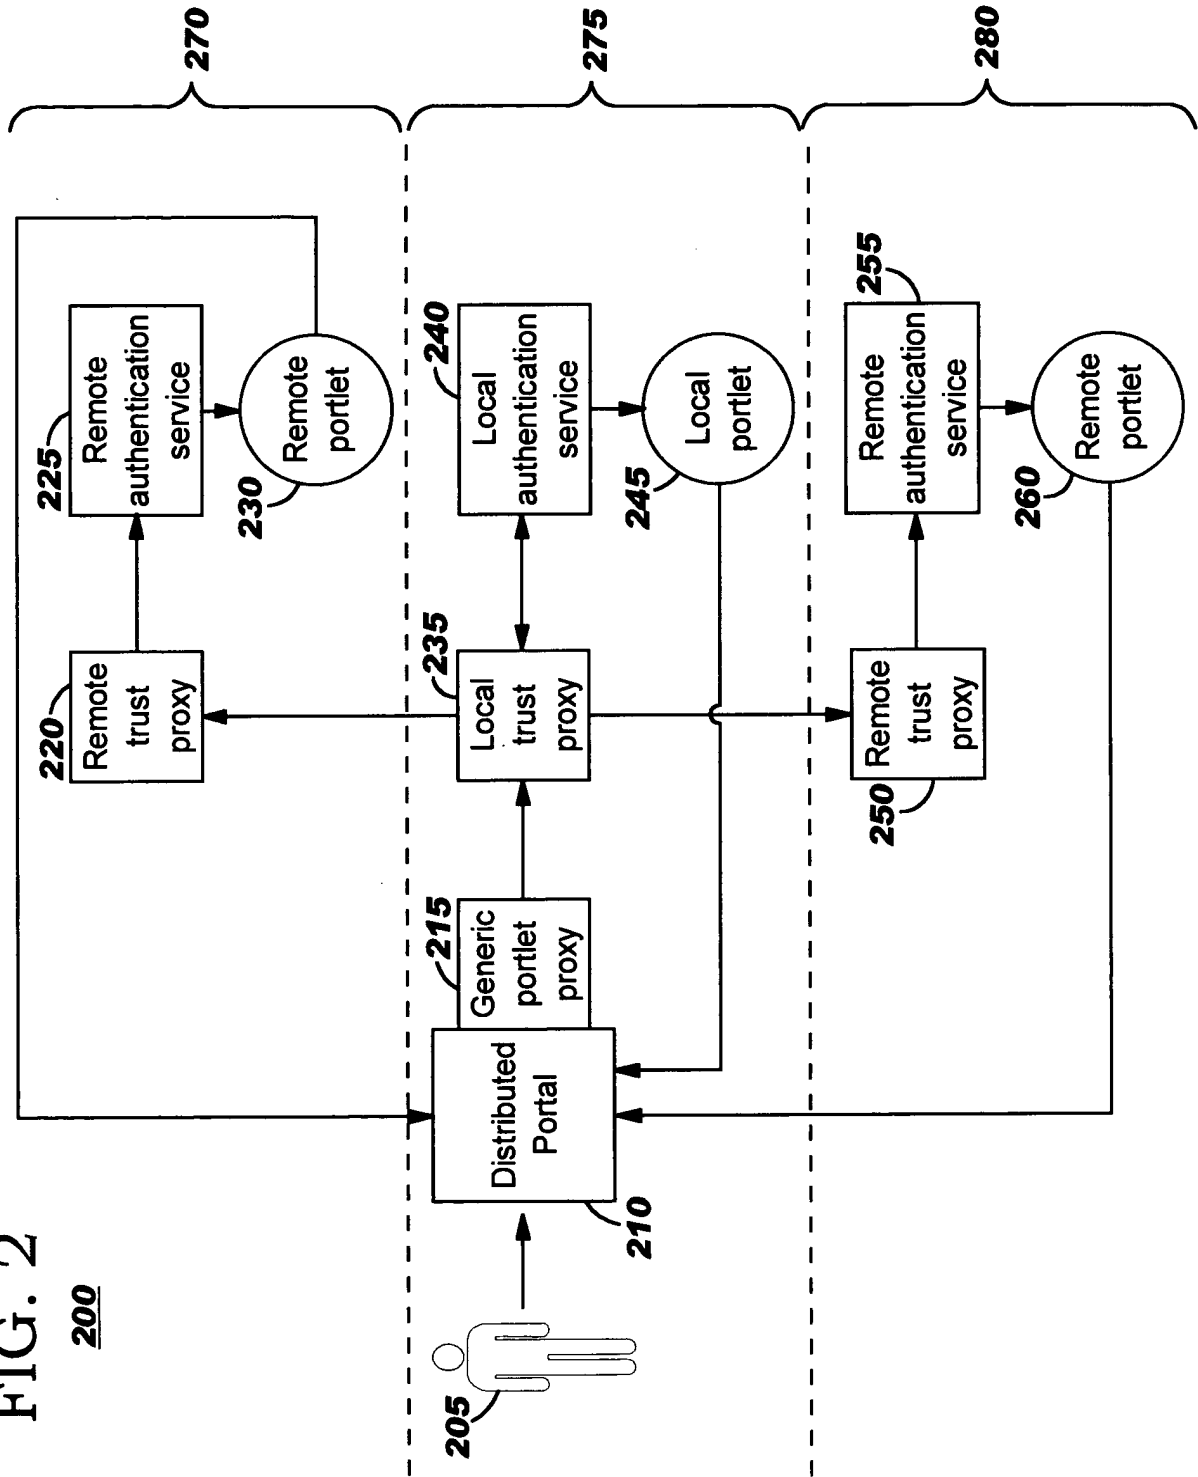


FIG. 3

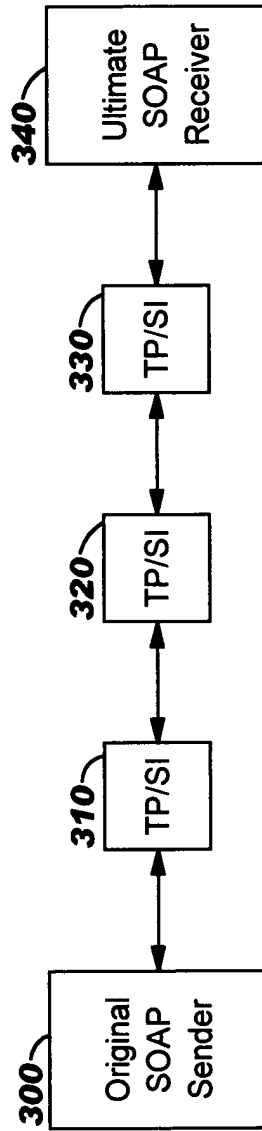


FIG. 4

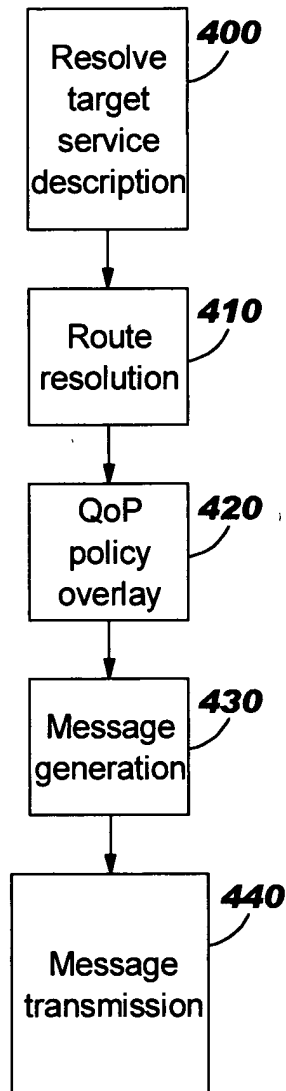


FIG. 5

**500**

```
<SOAP-ENV:Header>  
505— <p:traversalPathRef xmlns:xlink="www.w3.org/1999/xlink"  
      xmlns:p="www.ibm.com/p2p/schema/xlink/linkbase"  
      xlink:type="simple" xlink:show="new"  
510— xlink:href="http://ibm.sampleRoute/linkbase/lb.xml"  
      SOAP-ENV:mustUnderstand="1"/>  
</SOAP-ENV:Header>
```

FIG. 6

**600**

```
<SOAP-ENV:Header>  
605— <msgType>contentRequest</msgType>  
610— <securityHeader>  
      <msgReceiver>  
        <receiverID>1.2.3.4:999</receiverID>  
615— <receiverTagName>1234Tag</receiverTagName>  
      </msgReceiver>  
      <msgReceiver>  
620— <receiverRole>remote trust proxy</receiverRole>  
      <receiverTagName>RTPTag</receiverTagName>  
      </msgReceiver>  
      ...  
    </securityHeader>  
625— <1234Tag>2m3k4k5kak7p0ty3</1234Tag>  
630— <RTPTag>aXbYcZ...9q8j7k6w5p</RTPTag>  
</SOAP-ENV:Header>
```